

Calling a resident name or number

Calling Guard: press

2 kinds of modes for Calling residents:

Mode 1. : Press or to search the desired resident name then press

Mode 2. : Key in resident number directly then press

Storing resident name and number

Please store resident name (allowed range up to 16 characters) and resident number(the number must be 4 digits) at the same time .

First, open the front cover of PH-855C8, you will find a "PGM" switch which is located at the middle of left side.

Turn on the PGM switch to "ON" position, the screen will display

There are 2 ways to store resident information If you want to store "resident name" & "resident number" in PH-855C8, please choose "TEXT-3". For example, "0001 Mary Church"

Press "3" to access "TEXT-3" mode.

If you want to store "alphabetic string" & "resident number" in PH-855C8, please choose "FIXED-1".

For example, "0001 FLOOR A-20"

Press "1" to access "FIXED-1" mode.

TEXT-3 mode:

Store resident information steps:

- 1 Just 2 seconds display
- 2 Press
- 3 Press
- 4 Key in resident name +
- 5 Press ,name saved;
Press . clear all letters you key in
- 6 Key in the number of 4 digits +
- 7 If you want to store next resident information, this display is equal to step 2. Please repeat the step 2 to step 6 for storing other resident information.
If you don't want to store resident information, keep this display, just turn off the PGM switch.
Finish !

Table 1 for TEXT-3 mode

Key 1:	; - ; . ; * ; & ; / ; : ; # ; \$; 1 ;
Key 2:	A ; B ; C ; a ; b ; c ; 2 ;
Key 3:	D ; E ; F ; d ; e ; f ; 3 ;
Key 4:	G ; H ; I ; g ; h ; i ; 4 ;
Key 5:	J ; K ; L ; j ; k ; l ; 5 ;
Key 6:	M ; N ; O ; m ; n ; o ; 6 ;
Key 7:	P ; Q ; R ; S ; p ; q ; r ; s ; 7 ;
Key 8:	T ; U ; V ; t ; u ; v ; 8 ;
Key 9:	W ; X ; Y ; Z ; w ; x ; y ; z ; 9 ;
Key 0:	° ; → ; ← ; 0 ;

Revise / Delete resident information:

For example, if you have stored 3 resident information already. They were "0001 Mary Church", "0002 John Conner" & "0003 Peter Clock". But you want to revise(or delete) the resident information of "0001 Mary Church". Please turn on the PGM switch again, you will see the display

- 1 Just 2 seconds display
- 2 Press
- 3 Press
- 4 Press
- 5 Press Don't key in anything is equal to revise / delete
- 6 Press The resident information of "0001 Mary Church" has been erased. You will see the 2nd resident information, 3rd resident information.....
If you don't want to go on revise/delete other resident information, just turn PGM to "off" position.

FIXED-1 mode:

Press "1" to "Fixed-1 mode"

Store resident information steps:

- 1 2 seconds display
- 2 Press
- 3 Press
- 4 Key in alphabetic string +
- 5 Press , alphabetic string saved+
Press . clear all alphabetic string you key in
- 6 Key in the number of 4 digits+
- 7 If you want to store next resident information, this display is equal to step 2. Please repeat the step 2 to step 6 for storing other resident information.
If you don't want to store resident information, keep this display, just turn off the PGM switch.
Finish !

Table 2 for FIXED-1 mode

Key 1 and 4: FLOOR; BASEMENT; STORE; OFFICE; ;
Key 2 and 5: A; B; C; D; E; F; G; H; I; J; K; L; M; N; O; P; Q; R; S; T; U; V
; W; X; Y; Z; -30; -29; -28; -27; -26; -25; -24; -23; -22; -21
; -20; -19; -18; -17; -16; -15; -14; -13; -12; -11; -10; -9; -8
; -7; -6; -5; -4; -3; -2; -1; 0; R/C; 1°; 2°; 3°; 4°; 5°; 6°; 7°; 8°; 9°
; 10°; 11°; 12°; 13°; 14°; 15°; 16°; 17°; 18°; 19°; 20°; 21°; 22°
; 23°; 24°; 25°; 1; 2; 3; 4; 5; 6; 7; 8; 9; 10; 11; 12; 13; 14; 15
; 16; 17; 18; 19; 20; 21; 22; 23; 24; 25;
Key 3 and 6: LEFT; RIGHT; FRONT; REAR; RAISE; FALL; NORTH
; SOUTH; LFT; RGT; FR; RR;

Revise / Delete resident information:

For example, if you have stored 3 resident information already. They were "0001 FLOOR-21", "0002 FLOOR-22" & "0003 FLOOR-23". But you want to revise(or delete) the resident information of "0001 FLOOR-21". Please turn on the PGM switch again, you will see the display

Press "1" to "Fixed-1 mode"


- 1 2 seconds display
- 2 Press
- 3 Press
- 4 Press
- 5 Press
Don't key in anything is equal to revise / delete.
- 6 Press
The resident information of "0001 FLOOR-21" has been erased. You will see the 2nd resident information, 3rd resident information..... If you don't want to go on revise/delete other resident information, just turn PGM to "off" position.

500 door open passwords in PH-855C7/C8

Operation

1. Call control center(Guard Room) : Press
2. Call resident : 2 kinds of modes for calling residents, calling time is approx. 5 seconds.
Number Call : key in "resident number" + #
Resident number is allowed to edit from 1-digit to 4-digit.
List Call : Search the resident name you desired by or +
3. Calling not existed code(blank code), no message response and appear

Open door operation : PH-855C7/C8 with 500 open door passwords



Password is allowed to edit from 1-digit to 12-digit.

Editing open door password



You have accessed to editing mode.

Choose the following menus by or


- ADD NEW CODES: add new open door password to PH-855C7 / C8
 - EDIT CODES: revise / delete open door password to PH-855C7 / C8
 - VIEW CODES: view open door password in PH-855C7 / C8
 - CHANGE PASSWORD: change system password not open door password
- PS. 12345 is system password.

Change Password

This password is meaning "system password" not "open door password". The original system password in factory is [12345].

The best suggest that service provider should change [system password] when they would like to add new password at the first time .

Change system password steps:

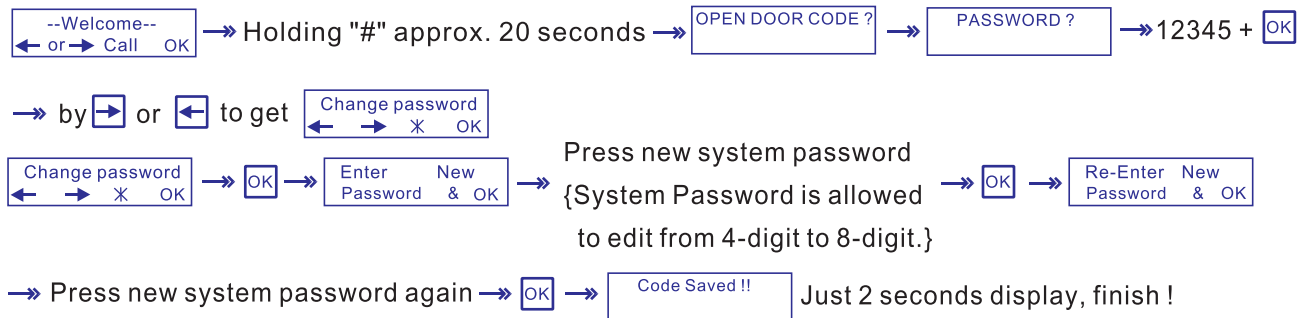

Add new Codes

1. ->
2. -> key in new open door password +
Password is allowed to edit from 1-digit to 12-digit.
3. Just 2 seconds display
4. If you want to add the next password, repeat above steps.

If you want to stop adding password, press " * " -> Pree " * " again return to

System automatically searches database, if the new password is the same as existed codes, the display will appear



Appearing Memory Full !! and return to Add New Code If memory storage is full.

Key in * for erasing all wrong digits and key in correct password.

Edit Codes

Edit codes this function only limits existed password.

1. Add New Code → OK

2. 001 000000001234 by → or ← to the desired password + OK , then to revise or delete password.

For example, you want to revise/delete the password(000086473333) of "003" :

Revise steps

003 000086473333 → OK → Revise password + OK → Code Saved !! Just 2 seconds display, finish revise !

Delete steps

003 000086473333 → OK → * → 003 000086473333 → OK → 001 000000001234 finish delete !

View Codes

This function limits only for viewing the resident password in database. To view all password or empty locations from 001 to 500.

Explanation

No matter you are adding/revising/deleting/changing or any operation on PH-855C7/C8, the display will return to

--Welcome-- over 30 seconds stand .