

**KANRICH**<sup>®</sup>  
www.kanrich.com

# 369 Digital Anti-Burglar Video Doorphon System

369 system is developed and made by KANRICH Electronic Corp. The operating system interface of 369 system is "Touchscreen", 7" / 10.2" touchscreen monitor and 3.5" touchscreen camera and 10.2" touchscreen control center. For the sake of adapting to a wide range of construction requirement, we developed into the composition of many module devices for meeting different requirement. We only roughly introduce camera /monitor/control center in catalogues.

Please contact our engineers or sales representatives for getting more detailed information of 369 system.

1. 369 system is a digital signal system, the video is transmitted by digital signal, just use CAT.5e network cable no need coaxial cable any more.
2. Only one CAT.5e network cable for the wire connection of whole system, if it needs the function of "door to door intercom", please add one pair of signal cable.
3. For the user interface (monitor & control center), we take touchscreen operating interface. 2 kinds of monitor types for choosing --- 7" LCD monitor and 10.2" LCD monitor. Camera is aluminum front panel with 3.5" touchscreen LCD. Control center is with 10.2" touchscreen LCD. The camera can be made for villa type according to customer requirement.
4. Door to door intercom: Each resident can intercom any one of residents and keep last 5 resident's codes you ever called. It is an optional function, if you need this function, the wire connection must be an extra one pair of signal cable.
5. Broadcasting: You can make a broadcasting to all residents on control center, But it is an optional item, this function is not standard function in control center.
6. Picture Storage: Each resident can store visitor's pictures are about 1,000 pcs, once over 1,000 pcs, it will be covered automatically.
7. Public emergency intercom: It is for parking lot / attic / stairwells / toilets and other public facilities. There are 2 kinds of types for choosing --- with video or without video.
8. Bulletin: To send a message to all residents from control center; The resident can easily grasp Community News. It is an optional item not standard, 7" touchscreen LCD monitor is no this function, please noted.
9. The capacity of main entrance: 1~4 camera, max. is 4 cameras.
10. Anti-burglar loops and CCTV:
  - \*\*\* With voice greeting function, the resident can choose on/off this function.
  - \*\*\* 7" touchscreen LCD monitor --- 3 N.O. + 4 N.C. loops.
  - \*\*\* 10.2" touchscreen LCD monitor --- 3 N.O. + 8 N.C. loops, floating type.
  - \*\*\* Each apartment can monitor the 8 CCTV of public area, this function must extra order control box.
11. The max. capacity for each apartment: Up to 8 video door bell camera and up to 8 monitors.
12. Listen to the sound identified source, there are a variety of different ringtones to different sources.



# 369 Digital Anti-Burglar Video Doorphon System

369C7b Touchscreen Camera  
For main Entrance



## Specifications

Consumption Current : Stand-by 150mA, Working 400mA

CCD: Color 1/3" CCD Board camera

Resolution: Color high resolution 768 (H)x 494 (V)

Signal noise rate: more than 48db

Picture Pixels: 380,000 Pixels

Maximum View Angle: 120 degrees (ultra wide angle)

Illumination: 4 white LED visible

Operating System Interface : 3.5" touchscreen LCD panel and sound guide

Communicating Interface: modulate packet processing

Audio - 2-wire R-T dual-way transmitting wire

Control – RS485 dual-way transmitting wire

Installation way: Flush mounting type

Outward Surface Material: 5mm Aluminum alloy front cover and steel plate base

Dimensions: (H)280mm / (W)140mm / (D)47mm

Flush part 42mm, the thickness after installation is 5mm

Weights: 1.3 kgs



Flush mounting type only

The dimensions of flush pre-box :

Steel with Zinc Plating (H)270mm / (W)130mm / (D)47mm , Weights: 0.55 kg

# 369 Digital Anti-Burglar Video Doorphon System

## 369M7 7" Touchscreen Monitor

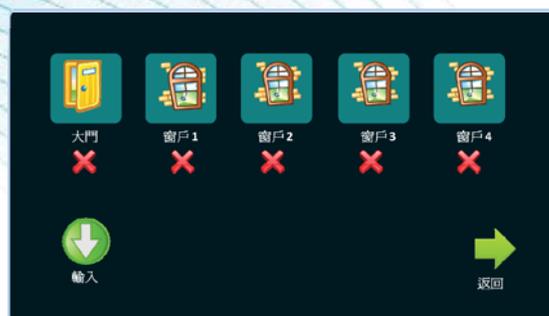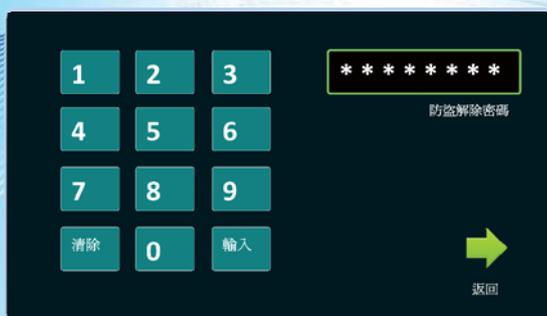

Working Voltage : DC 15V

Consumption Current : Stand-by 150mA, Working 500mA

Monitor Screen : 7"

Resolution: 800 RGB x 480 pixel

Color : 262,144

Operating System Interface : 7" touchscreen LCD panel

Anti-burglar loops & CCTV :

\*\*\* With voice greeting function, the resident can choose on/off this function.

\*\*\* "Do not disturb" function, the resident can choose on/off this function.

\*\*\* 7" touchscreen LCD monitor --- 3 N.O. + 4 N.C. loops.

Communicating Interface: modulate packet processing

Audio - 2-wire R-T dual-way transmitting wire

Control - RS485 dual-way transmitting wire

Installation way: Surface mounting type(no need pre-box)

Outward Surface Material: 5mm Aluminum alloy front cover and ABS base



Dimensions: (H)150mm / (W)235mm / (D)28mm

Weights: 0.7 kgs



# 369 Digital Anti-Burglar Video Doorphon System

## 369M7 10.2" Touchscreen Monitor

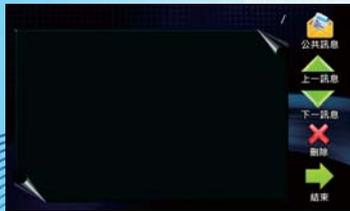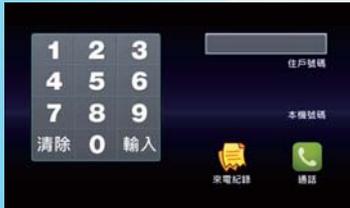

Working Voltage : DC 15V

Consumption Current : Stand-by 150mA, Working 800mA

Monitor Screen : 10.2"

Resolution: 800 RGB x 480 pixel

Color : 262,144

Operating System Interface : 10.2" touchscreen LCD panel

Anti-burglar loops & CCTV :

\*\*\* With voice greeting function, the resident can choose on/off this function.

\*\*\* 10.2" touchscreen LCD monitor --- 3 N.O. + 8 N.C. loops , floating type.

Optional Function : To receive the message of bulletin, this is an optional function not standard function .

Communicating Interface: modulate packet processing .

Audio - 2-wire R-T dual-way transmitting wire

Control - RS485 dual-way transmitting wire

Installation way: Surface mounting type(no need pre-box)

Outward Surface Material: ABS front cover and ABS base

Dimensions: (H)180mm / (W)275mm / (D)34mm

Weights: 1.0 kgs



# 369 Digital Anti-Burglar Video Doorphon System

## 369CC 10.2" Touchscreen Control Center



"Single block" control function, access control for resident and main entrance .

It can connect 1 ~ 4 main entrances through CC Box .

There is user mode switch to switch "daytime mode" and "night more", visitor can make a call on camera and talk with resident directly. Or all control rights are on control center .

The door status indication and system occupied indication for each building .

10.2" touchscreen LCD monitor, you can get all messages and operate all functions by touchscreen, 15 resident code memories storage.

Monitoring the camera of main entrance :

Single-Block type : monitoring / monitor listening / to release the door lock which you are watching.

Multi-Block type : No monitoring only monitor listening / to release the door lock which you are watching

Boardcasing : It is an optional function – to broadcast the message to all residents.

Door To Door Intercom : It is an optional function – the resident can intercom another resident, the video doorphone function is totally not influence .

Resident alarm loops display area – N.O. loops and N.C. loops of each resident, once be triggered, the system will send an instant message to control center.

The system can be connected public emergency intercom, there are 2 kinds of types for choosing --- with video or without video . The video of public emergency intercom can be sent to control center not through DVR .

Power : DC 15V

Capacity : Standard Type is single block, order CC Box(an optional item) to be multi-block type.

Power Consumption : DC15V-1A

Dimensions: (H)45~70mm / (W)280mm / (D)200mm

Material: iron painting

Installation way: Desktop Type

Handsfree communication or Handset communication